

GUARDTITE – 13-42 CFL 35-70 HID VAPOR-PROOF

For Industrial, Commercial and Food Processing



FEATURES

- Die Cast Aluminum
- Conduit or Box Mounting
- CFL Fluorescent Lamps
- Pulse Start HID
- Colored Globes and Housings
- Indoor or Outdoor Use
- Custom Finishes

BENEFITS

- Silent CFL Operation
- Instant CFL Restrike
- Vandal Resistant Globes
- High CRI Lamps
- Long Life Lamps
- High Lumens
- Low Energy

APPLICATIONS

- Entrances
- Loading Docks
- Treatment Plants
- Food Processing
- Tunnels
- Retail
- Utility Areas

Specifications/Features

GENERAL

- Wet location vaporproof fixture in 3 sizes for indoor and outdoor non-hazardous applications.

CONSTRUCTION

- Die cast aluminum with brass screws.
- High temperature silicone internal gaskets.
- Top and side 1/2" or optional 3/4" NPS threaded hubs.
- Cast aluminum guard with set screw.
- Natural unpainted finish standard.
- Optional silver grey, white, or black powder coat.

GLOBE

- Clear prismatic, heat-resistant glass standard.
- Optional polycarbonate and glass in 5 colors for fluorescent lamps.

LISTINGS

- UL/CUL - Listed for wet locations.

BALLASTS

- CFL - electronic 120/277 volt.
- HID - 120 NPF, Dual and Quad HPF.
- Use 90°C supply wire.

LAMPS

- 13-26 watt PLC 4 pin CFL.
- 32-42 watt PLT Triple Tube CFL.
- 35, 50, 70 ED-17 HPS.
- 50, 70 ED-17 Pulse Start MH.


OPTIONAL REFLECTORS

- Dome or 30° angle reflector.
- Threads to fixture.
- White polyester powder over heavy gauge steel.




Custom chrome finish


Dimensions

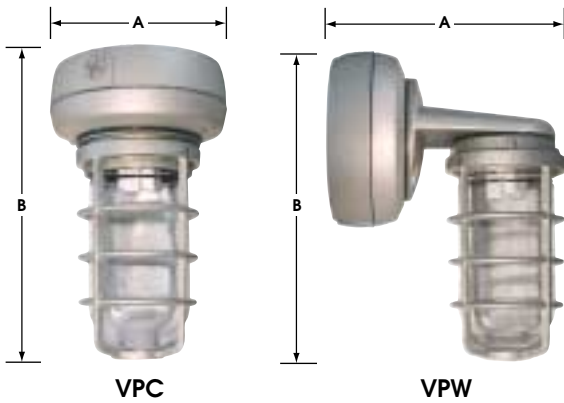


	VPC	VPW	VPC		VPW	
	13-26W CFL		HID	32-42W CFL	HID	32-42W CFL
A	6" 15.2 cm	7-7/8" 20 cm	7-1/2" 19 cm	6" 15.2 cm	10" 25.4 cm	8-1/2" 22 cm
B	9-3/4" 24.7 cm	10-3/8" 26 cm	13-1/4" 33.6 cm	12" 30.5 cm	13-1/4" 33.6 cm	12-1/2" 32 cm

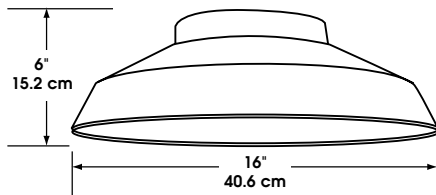

Dome Reflector
(VPC only)

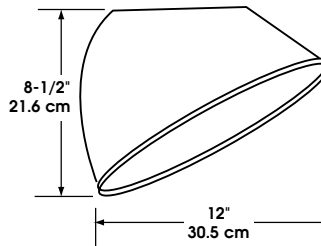

Angle Reflector

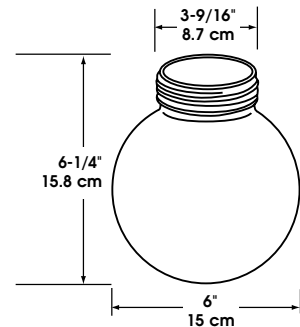

White Globe
(13-26 CFL only)

Ordering Data (includes lamp)

VPW - 32T

SERIES
VPW - Wall Mount
VPC - Ceiling Mount

LAMP/BALLAST
13Q - 13w CFL 120/277V
26Q - 26w CFL 120/277V
32T - 32w CFL 120/277V
42T - 42w CFL 120/277V
50P - 50w PS MH 120/277V
70PN - 70w PS MH 120 NPF
70P - 70w PS MH Quad Tap
35HN - 35w HPS 120 NPF
50HN - 50w HPS 120 NPF
50H - 50w HPS 120/277V
70HN - 70w HPS 120 NPF
70H - 70w HPS Quad Tap

NOTE:
Standard fixture has natural finish and includes prismatic,
heat resistant glass globe, cast guard and lamp.

Options

S - Silver Grey Finish
W - White Finish
B - Black Finish
"3/4" - 3/4" Hub
COLORED GLOBES (fluorescent only)
GLASS
GLO - Opal
GLR - Ruby
GLB - Blue
GLG - Green
GLA - Amber
GLBO - White Globe
POLYCARBONATE
PCO - Opal
PCR - Ruby
PCB - Blue
PCG - Green
PCA - Amber
PBO - White Globe

Accessories

DOME REFLECTORS
VP100ST - 13-26 CFL
VP200ST - all others
ANGLE REFLECTORS
VP100A - 13-26 CFL
VP200A - all others



Project Name:

Type	Catalogue Number	Lamp	Comments